

Tech Specs

UniFi UISP Branding

Switching WiFi Camera Security Door Access Cloud Keys & Gateways Power Tech New I


Camera Security > AI Pro

Datasheet

In The Box

Marketing Images

Installation Guide

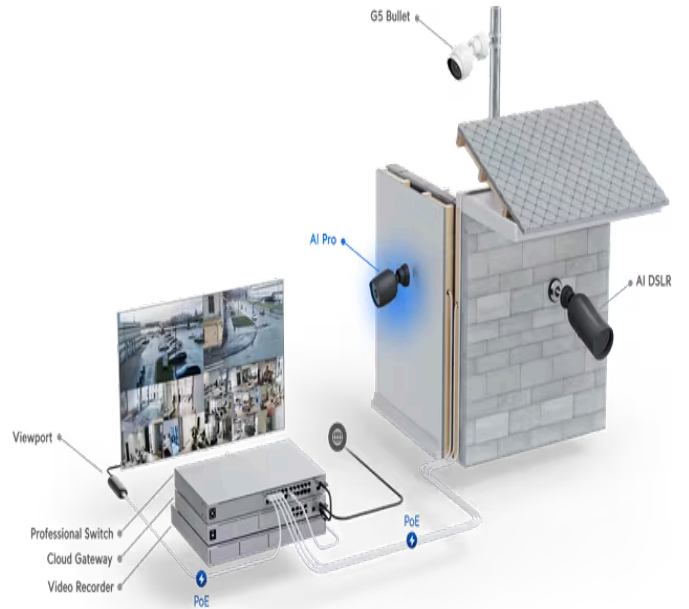

Mechanical

Dimensions

Without mount: Ø86 x 112.6 mm (Ø3.4 x 4.4")
 With mount: Ø86 x 175.3 mm (Ø3.4 x 6.9")

Weight

Without mount: 675 g (1.5 lb)
 With mount: 820 g (1.8 lb)

Enclosure material

Aluminum alloy, polycarbonate

Mounting material

Aluminum alloy

Weatherproofing

IP65

Resistance IK04

Optics

Sensor 1/1.8" 8MP

Lens F 4.1-12.3 mm; f/1.53-f/3.3

View angle Wide: H: 109.9°, V: 59.9°, D: 127.7°
Zoom: H: 34.9°, V: 19.7°, D: 40°

Night mode Built-in IR LED illumination and an IR cut filter

Video

Resolution 8MP 3840 x 2160 (16:9)

Max. frame rate 30 FPS

Image settings Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay, HDR

System

Processor Quad-core Arm® Cortex®-A53 based chip

Networking interface GbE RJ45 port

Max. power consumption 11W

Power method PoE+

Supported voltage range 37—57V DC

LED R/G/B/W ring

Button Factory reset

Mounting Wall, ceiling, pole mount

Ambient operating temperature -20 to 50° C (-4 to 122° F)

Ambient operating humidity 10 to 90% noncondensing

Certifications FCC, IC, CE

Audio

Microphone	Yes (Can be disabled)
Speaker	Yes
2-way audio	Far-field microphone array

Software

Web application	UniFi Protect
Mobile app	UniFi Protect iOS™ and Android™

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.